



Information

Mira AGH direct gas fired air heater is developed for use in poultry and greenhouse applications. With direct heating, it operates at maximum efficiency. It has 3 stage power automation with capacities varies from 40kW to 120 kW. It can operate with LPG, Natural Gas and Propane.




Features

-  304 Stainless steel case and 316 burner
-  Digital Screen, 3 step power control
-  IP65 protected heater
-  %100 efficiency
-  Optional room thermostat
-  Easy connect to control systems



Model	AGH 40	AGH 70	AGH 100	AGH 120
Heat Power (kW)	40-30-20 (3 steps)	70-50-40 (3 steps)	100-80-60 (3 steps)	120-100-60 (3 steps)
NG Consumption (m ³ /h)	3,77 - 2,82 - 1,88	6,59 - 4,70 - 2,90	9,41 - 7,53 - 5,64	11,29 - 9,41 - 5,64
LPG Consumption (kg/h)	2,90 - 2,17 - 1,45	5,07 - 3,62 - 2,18	7,24 - 5,79 - 4,34	8,68 - 7,24 - 4,34
Gas Connection	G 3/4			
Air flow (m ³ /h)	4000	5700	7000	
Weight (kg)	20	25	30	32
Electric Power (W)	220	300	500	500
Voltage Supply	230 V / 50-60 Hz			
L x W x H (mm)	900 x 400 x 470	1100 x 450 x 520	1100 x 520 x 600	1260 x 520 x 600

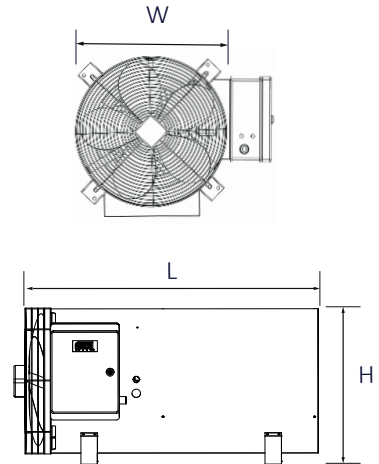



информация

Прямой газовый воздухонагреватель Mira AGH разработан для использования в птицеводческих хозяйствах и теплицах. При прямом нагревании он работает с максимальной эффективностью. Имеет трехступенчатую регулировку мощности. Имеет разные модели мощностью от 40 кВт до 120 кВт. Он может работать на природном газе, сжиженном нефтяном газе и пропане.

Характеристики

-  корпус из нержавеющей стали 304 и горелка 316
-  3-ступенчатое цифровое управление
-  Обогреватель с защитой IP65
-  100% эффективность
-  Дополнительный комнатный термостат
-  Простое подключение к системе



Модель	AGH 40	AGH 70	AGH 100	AGH 120
Мощность (кВт)	40-30-20 (3 steps)	70-50-40 (3 steps)	100-80-60 (3 steps)	120-100-60 (3 steps)
Расход природного газа (м³/ч)	3,77 - 2,82 - 1,88	6,59 - 4,70 - 2,90	9,41 - 7,53 - 5,64	11,29 - 9,41 - 5,64
Расход СУГ (кг/ч)	2,90 - 2,17 - 1,45	5,07 - 3,62 - 2,18	7,24 - 5,79 - 4,34	8,68 - 7,24 - 4,34
подключение газа	G 3/4			
Расход воздуха (м³/ч)	4000	5700	7000	
Вес (кг)	20	25	30	32
Электроэнергия (W)	220	300	500	500
Подключение питания	230 V / 50-60 Hz			
L x W x H (mm)	900 x 400 x 470	1100 x 450 x 520	1100 x 520 x 600	1260 x 520 x 600

